

PROTECTO[®]

PROTECTO is a modular, state-of-the-art temporary edge protection system.



At Work For You

The edge protection system without compromises – equal to all requirements and easy to handle. With everything that's needed to create safe working conditions on the building site.

► Product advantages PROTECTO®

Versatile

Versatile modular system composed of just a few robust basic components

Railing post fits any PROTECTO holder, bracket or clamp

Easy handling

Lightweight basic parts and easy handling ensure simple and safe on-site installation

Screw base joint can easily be fixed to the base slab

Safe

Completely fulfills the technical and safety requirements of the EN 13374 – Class A

The PROTECTO fixing device for clamp allows the installation of a clamped side protection on stairways

New protective gratings in various lengths enable safe and easy overlaps

Economical

Very economical as a result of the low erection and dismantling times

Strong & durable

Highly durable and robust system parts due to the complete galvanization of all steel components




► Screw base joint can easily be fixed to the base slab



► Versatile modular system composed of just a few robust basic components

► Technical specifications PROTECTO®

Product description	Temporary edge protection system
Guardrail post	PROTECTO railing post 120 cm high (square tube)
Base attachment via	Screw base joint Staircase bracket Beam section clamp Timber beam connector Post holder vari Front attachment Multiple clamp Screw-on holder Sheet pile clamp
Guardrail types	PROTECTO protective grating Plank railings
Toe board attachment	PROTECTO toe board retainer
Corrosion protection	Hot-dip galvanization
Average weight	6.00 – 8.00 kg/running meter
Relevant standards	Complies with EN 13374 – Class A
Maximum post distance	2.00 m using planks 2.40 m using protective grating
Erection/dismantling times	Approx. 0.02 – 0.03 h/linear meter*
Special features	<ul style="list-style-type: none"> • Fast, versatile and easy assembly • Integrated safety pin secures the post firmly to base • Height adjustment with post extension 26 and 42

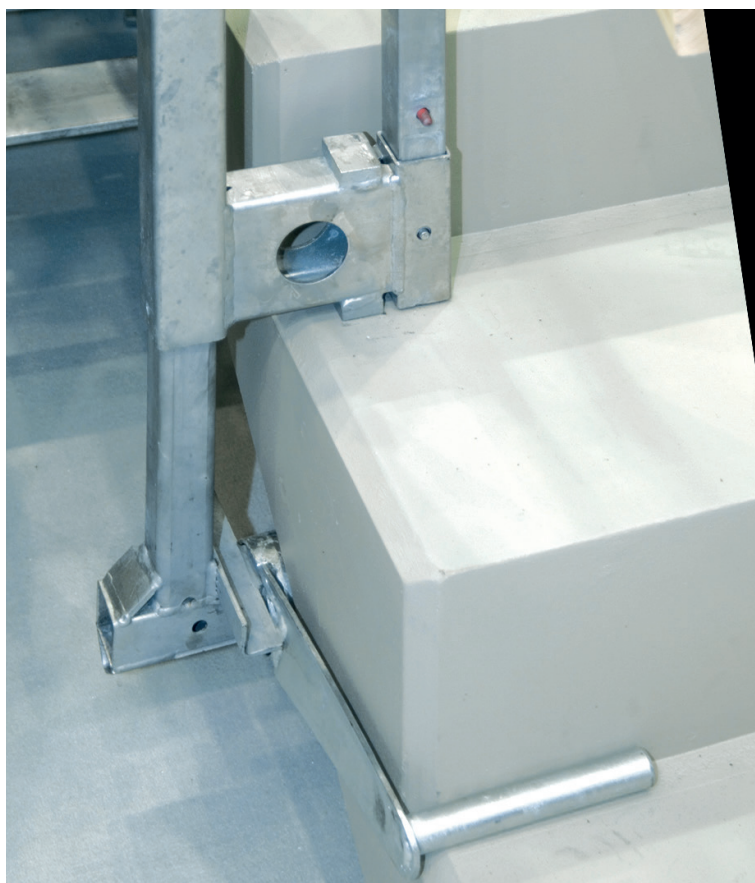

► The PROTECTO fixing device for clamp in combination with the PROTECTO multiple clamp, the PROTECTO railing post and a plank railing allows the installation of a railing to stairways.

* Time calculation (average) by Hünnebeck



► PROTECTO is compatible with all Hünnebeck slab formwork systems, such as TOPMAX as shown here



► Very economic as a result of the low erection and dismantling times

Application & Use

- › Slab formwork
- › Climbing formwork
- › Staircases
- › Bracket scaffolds
- › Concrete slabs and walls

PROTECTO® integrates with

- › TOPMAX®
- › TOPEC®
- › TOPFLEX®
- › INFRA-KIT
- › H 20 timber beams
- › R 24 timber beams
- › Steel beams



If you want to learn more,
watch our video.

UAE
Phone: +971 4 8132000
Egypt
Phone: +202 2359 1568

Saudi Arabia
Phone: +966 12 691 7690
Malaysia
Phone: +60 3 42965455

Singapore
Phone: +65 68 626122

SGB
BY BRAND SAFWAY